

Typical Data for Models 2606-3A and 2606-3B Bandpass Filters

Performance Specifications


Type:	Interdigital	
Size:	6"	
No. of Poles:	3	
Typical VSWR	at ± 100 kHz:	1.02:1
	at ± 150 kHz:	1.05:1
	at ± 200 kHz:	1.08:1
Typical Insertion Loss:	-0.45 dB	
Typical Frequency Response (deviation from center frequency)	at ± 100 kHz:	-0.04 dB
	at ± 150 kHz:	-0.08 dB
	at ± 200 kHz:	-0.10 dB
Typical Group Delay (deviation from center frequency)	at ± 100 kHz:	20 nsec
	at ± 150 kHz:	50 nsec
	at ± 200 kHz:	100 nsec
Typical Bandwidth:	± 200 kHz	



Inputs, Outputs, and Weight:

	Model 2606-3A	Model 2606-3B
Maximum Input Power:	5 kW	8 kW
Cooling:	Convection	Forced Air
Inputs:	1-5/8" EIA	1-5/8" EIA
Outputs:	1-5/8" EIA	1-5/8" EIA
Shipping Weight:	175 lb (80 kg)	180 lb (82 kg)

Dimensions:

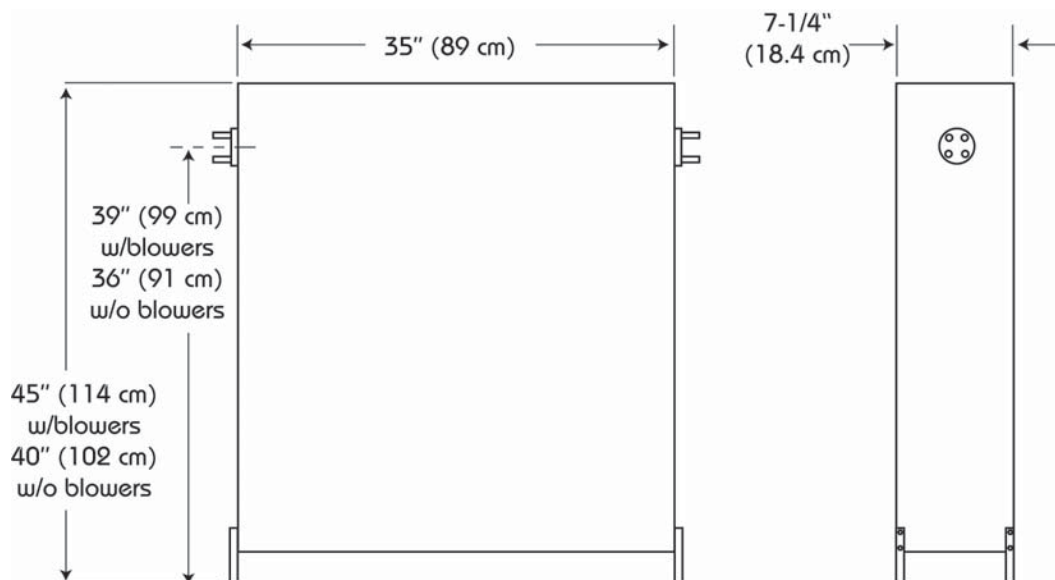

Document No. ds-2606-3 (100616)

A Division of Howell Laboratories, Inc., P. O. Box 389, Bridgton, Maine 04009 USA
 (207) 647-3327 1-888-SHIVELY Fax: (207)647-8273
 An Employee-Owned Company

www.shively.com
 sales@shively.com
 Certified to ISO-9001:2000