

## Typical Data for Model 2912 Low-Power Notch Filter

Boosts isolation from one - or two - specific frequencies in the same system. Minimum spacing between primary frequency and any other "notch" frequency is 2 MHz.



### Performance Specifications:


VSWR:		Less than 1.1:1 typical
Insertion Loss:		Less than 0.15 dB
Isolation:	single-notch configuration:	greater than -50 dB
	dual-notch configuration:	greater than -20 dB
Power Handling:		500 W

### Inputs, Outputs, and Weight:

Connections:	Type "N" Female
Dimensions:	8" wide x 4" deep x 48" high
Weight:	20 lb (9.1 kg)
Mounting:	Bolt holes located in spacer bracket and base plate


### Single-Notch Configuration

N	SWP Param, MHz	Val, dB
0	96.3	-54.467
1	103.3	-0.121
2	104.5	-0.1031
3	105.9	-0.1182

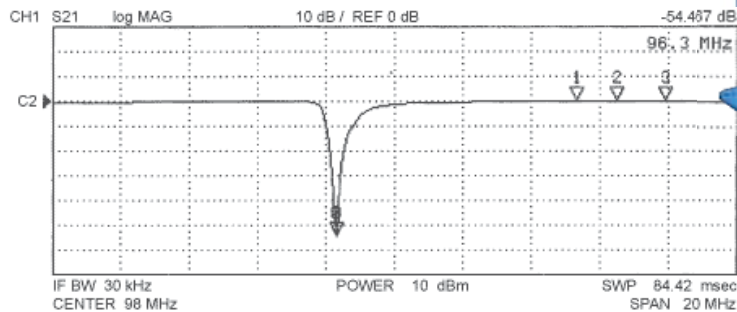

### Dual-Notch Configuration

N	SWP Param, MHz	Val, dB
0	99.5	-0.1425
1	91.1	-23.785
2	95.3	-22.931

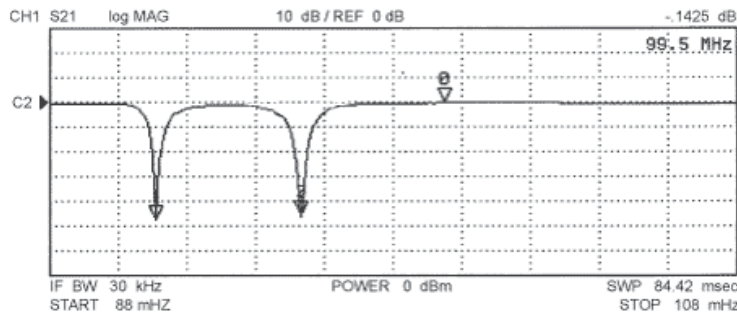

Document No. ds-2912 (090520)

A Division of Howell Laboratories, Inc., P. O. Box 389, Bridgton, Maine 04009 USA

(207) 647-3327

1-888-SHIVELY

Fax: (207)647-8273

www.shively.com

sales@shively.com

An Employee-Owned Company

Certified to ISO-9001:2000