


Attenuation vs. Frequency for Copper Transmission Line

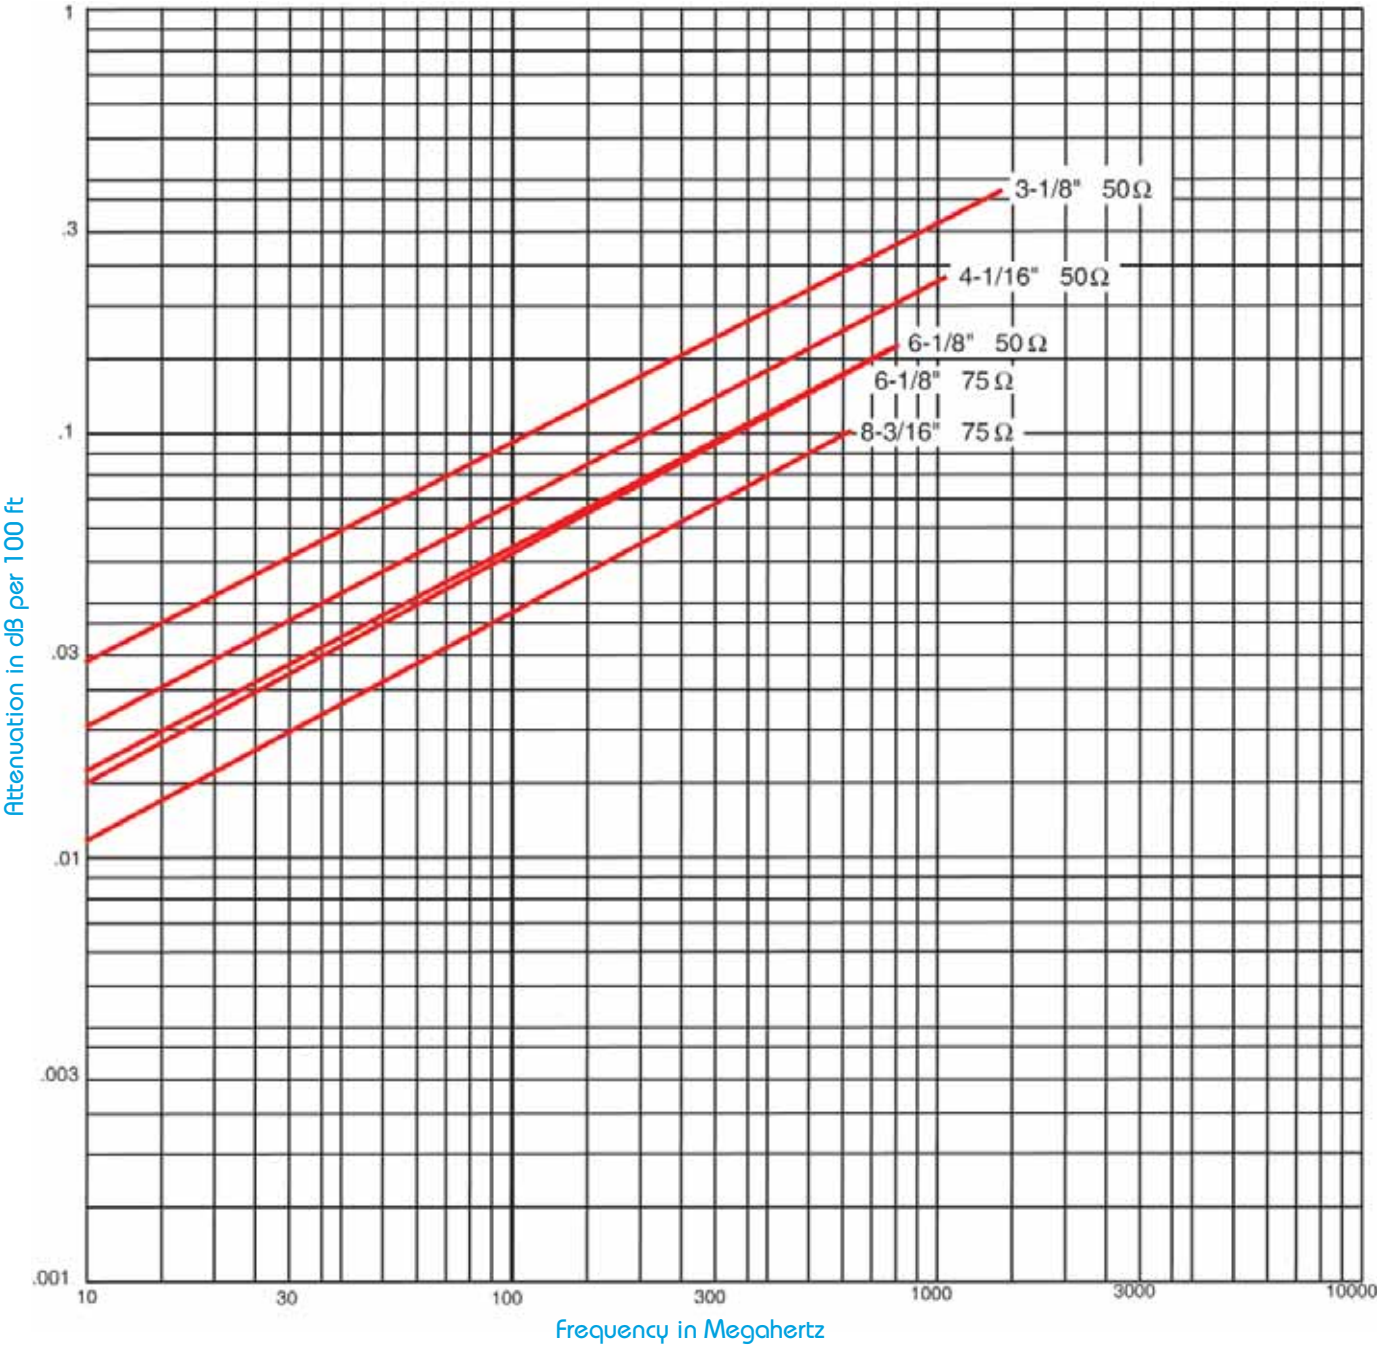

Note: Attenuation is based on 20° C (68° F) ambient.

Document No. tb-atten_vs_freq (0610-1)