

## Data for Models 2630-3A-06 and 2630-3B-06 Three-Station Branched Combiners

### Performance specifications

Type:	Interdigital	
Size:	6"	
No. of poles per station:	3	
Typical VSWR	at $\pm 100$ kHz:	1.05:1
	at $\pm 150$ kHz:	1.05:1
	at $\pm 200$ kHz:	1.10:1
Typical insertion loss:	-0.45 dB	
Typical frequency response (deviation from center frequency)	at $\pm 100$ kHz:	-0.04 dB
	at $\pm 150$ kHz:	-0.08 dB
	at $\pm 200$ kHz:	-0.10 dB
Typical group delay (deviation from center frequency)	at $\pm 100$ kHz:	25 nsec
	at $\pm 150$ kHz:	50 nsec
	at $\pm 200$ kHz:	200 nsec
Typical bandwidth:	$\pm 200$ kHz	
Spur rejection, 800 kHz or greater:	Greater than 80 dB	


### Power rating:

	Model 2630-3A-06	Model 2630-3B-06
Maximum input power:	5 kW	8 kW
Cooling:	Convection	Forced Air

### Inputs, outputs, and weight:

	Model 2630-3A-06	Model 2630-3B-06
Inputs:	1-5/8" EIA	1-5/8" EIA
Outputs:	3-1/8" EIA	3-1/8" EIA
Shipping weight:	565 lb (257 kg)	580 lb (264 kg)

### Dimensions:

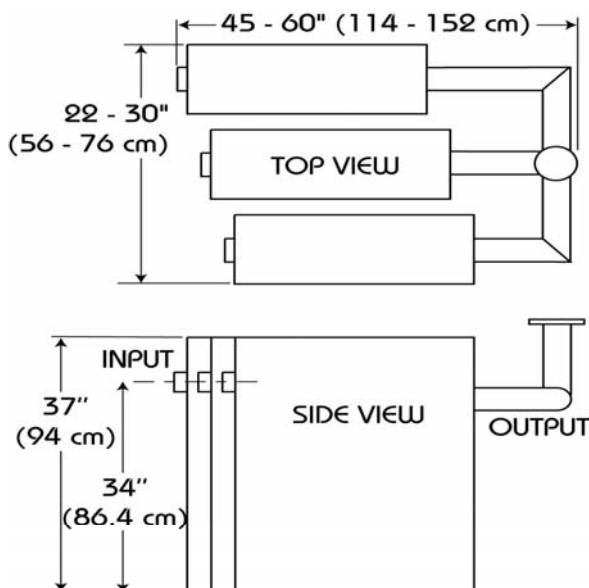

Document No. ds-2630-3-06 (150317)